



Europäisches Patentamt
European Patent Office
Office européen des brevets

⑪ Publication number:

0 253 666
A2

⑫

EUROPEAN PATENT APPLICATION

⑯ Application number: 87306308.5

⑮ Int. Cl. 4: B 41 M 5/26

⑰ Date of filing: 16.07.87

⑲ Priority: 16.07.86 JP 167646/86
23.07.86 JP 173171/86
14.10.86 JP 243823/86
14.10.86 JP 243824/86
14.10.86 JP 243825/86

⑳ Date of publication of application:
20.01.88 Bulletin 88/03

㉑ Designated Contracting States: DE ES FR GB

㉒ Applicant: FUJI PHOTO FILM CO., LTD.
210 Nakanuma Minami Ashigara-shi
Kanagawa 250-01 (JP)

㉓ Inventor: Ikeda, Kensuke
Fuji Photo Film Co., Ltd No. 200, Onakazato
Fujinomiya-shi Shizuoka (JP)

Iwakura, Ken
Fuji Photo Film Co., Ltd No. 200, Onakazato
Fujinomiya-shi Shizuoka (JP)

Satomura, Masato
Fuji Photo Film Co., Ltd No. 200, Onakazato
Fujinomiya-shi Shizuoka (JP)

㉔ Representative: Diamond, Bryan Clive et al
Gee & Co. Chancery House Chancery Lane
London WC2A 1QU (GB)

㉕ Heat-sensitive recording material containing dye-forming components.

㉖ Heat-sensitive recording material comprises a support bearing a recording layer of a composition containing, in a binder, (a) an electron-donating colorless dye former (e.g. triphenylmethane phthalide), (b) an electron-accepting color developer, in amount preferably 100 - 500% of (a), a salicylic acid derivative having an acyl, a substituted amino, aryloxy-methyl, alkoxy or aryloxy group, or a metal salt thereof, or (ii) a hydroxynaphthoic acid derivative having an alkylloxy group or a metal salt thereof; and (c) a metal compound (e.g. an oxide, hydroxide, halide or salt of Zn, Mg, Ba, Ca, Al, Sn, Ti, Ni, Co, Mn or Fe) in an amount of from 0.05 to 10 mols per mol of (a).

Other color developers may be present.

A heat-fusible substance is preferably included.

Local heating, e.g. in a facsimile machine, produces a good visible image.

EP 0 253 666 A2

Description**HEAT-SENSITIVE RECORDING MATERIAL CONTAINING DYE-FORMING COMPONENTS**

The present invention relates to a heat-sensitive recording material utilizing a color formation reaction between an electron-donating colorless dye and an electron-accepting compound, and more particularly, a recording material providing a color image having improved color developability, preservability before recording, and image stability.

Recording materials employing a combination of an electron-donating colorless dye (hereinafter referred to as a color former) and an electron-accepting compound (hereinafter referred to as a color developer) are well known, and include pressure-sensitive papers, heat-sensitive papers, light- and pressure-sensitive papers, electric heat-sensitive papers, heat-sensitive transfer papers, and the like. The details of these types of recording materials are described, e.g., in British Patent 2,140,449, U.S. Patents 4,480,052 and 4,436,920, Japanese Patent Publication No. 23922/85, U.S. Patent Application Serial No. 916,430 (filed on October 7, 1986), and Japanese Patent Applications(OPI) Nos. 179836/82, 123556/85 and 123557/85 (the term "OPI" as used herein refers to a "published unexamined Japanese patent application").

These recording materials employing a color former and a color developer are required (1) to provide an image having sufficient color density with sufficient color formation sensitivity, (2) to be free from the formation of fog, (3) to provide an image having sufficient fastness, (4) to form a hue suitable for copying machines, (5) to have a high S/N ratio, (6) to provide a developed image sufficiently resistant to chemicals, and the like. However, none of the above-mentioned various types of conventional recording materials has completely fulfilled these requirements.

In particular, heat-sensitive recording materials, which have recently undergone remarkable development, have the specific disadvantages in that fog may form on contact with solvents, etc., and discoloration of a developed image may occur due to contact with fats and oils, chemicals, etc. Namely, contact with stationery and office supplies, such as aqueous ink pens, oily ink pens, fluorescent pens, stamping inks, adhesives, paste adhesives, diazo developers, etc., or cosmetics, such as hand creams, emulsions, etc., causes color formation on the white background (fog) or discoloration of a developed color image, resulting in significant impairment of commercial value. Moreover, with the recent increase in demand for heat-sensitive recording materials as POS labels, it has keenly been demanded to develop heat-sensitive recording materials having high chemical resistance.


The present invention has resulted from detailed investigations on each of color formers and color developers, paying particular attention to solubility in oil or water, partition coefficient, pKa, polarity of substituents, position of substituents, change in crystallizability and solubility when used in combination, and the like.

One object of the present invention is to provide a heat-sensitive recording material having satisfactory color developability, preservability before recording, and developed image stability, while satisfying other practical requirements for recording materials.

It has now been found that the above objects of the present invention can be accomplished by a heat-sensitive recording material utilizing a color formation reaction between an electron-donating colorless dye (color former) and an electron-accepting compound (color developer) in a heat-sensitive recording layer, wherein the color developer is selected from salicylic acid derivatives having an acyl group, a substituted amino group, an aryloxymethyl group, an alkoxy group or an aryloxy group, or metal salts thereof, and hydroxynaphthoic acid derivatives having an alkoxy group or metal salts thereof, and the recording layer contains a metal compound in an amount of from 0.05 to 10 mols per mol of the electron-accepting compound.


The recording materials using at least one of the above-described color developer compounds in combination with a metal compound according to the present invention are capable of forming color images having sufficient color density and marked stability against discoloration due to long-term exposure to light, heat or moisture. Further, recording materials employing these color developers are free from the formation of fog due to contact with solvents or discoloration due to fats, oils or chemicals.

The electron-accepting compound used in the present invention may be represented by formula (I) or (II):

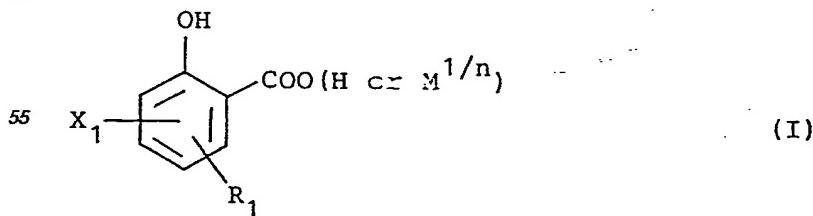


wherein R₁ represents a substituted or unsubstituted acyl group, a substituted amino group, a substituted or unsubstituted aryloxymethyl group, a substituted or unsubstituted alkoxy group, or a substituted or unsubstituted aryloxy group; X₁ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group

or a halogen atom; and M represents an n-valent metal atom, wherein n represents an Integer of from 1 to 3;

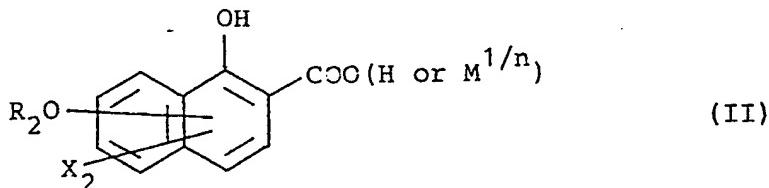


wherein M is as defined above in formula (I); R₂ represents a substituted or unsubstituted alkyl group; and X₂ represents a hydrogen atom, an acyl group, an alkyl group, an alkoxy group or a halogen atom.

The acyl- or (substituted amino)-substituted salicylic acid derivatives or metal salts thereof are preferably represented by formula (III):

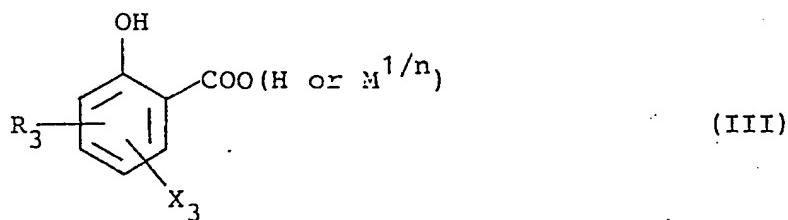


wherein R₃ represents a substituted or unsubstituted acyl group or a substituted amino group; X₃ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group or a halogen atom; and M represents an n-valent metal atom, wherein n represents an Integer of from 1 to 3.

The aryloxymethyl-substituted salicylic acid derivatives or metal salts thereof are preferably represented by formula (IV):

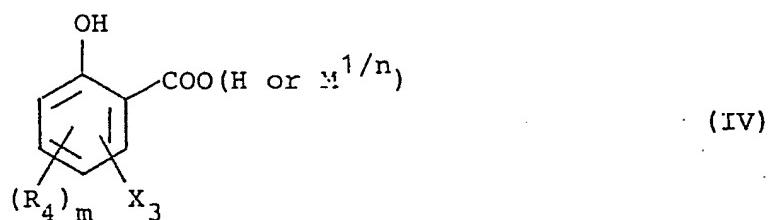


wherein X₃ and M are as defined above in formula (III); R₄ represents a substituted or unsubstituted aryloxymethyl group; and m represents an integer of 1 or 2.

The alkoxy- or aryloxy-substituted salicylic acid derivatives or metal salts thereof are preferably represented by formula (V):

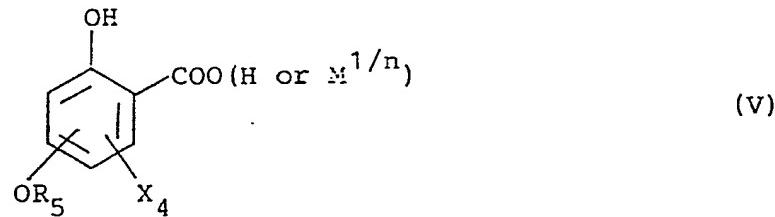

wherein M is as defined above in formula (III); R₅ represents a substituted or unsubstituted alkyl group or a substituted or unsubstituted aryl group; and X₄ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group or a halogen atom.

The hydroxynaphthoic acid derivatives or metal salts thereof are preferably represented by formula (VI):

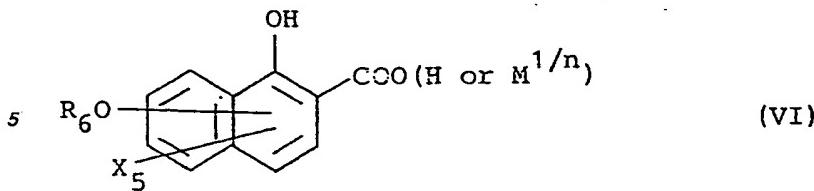

10 wherein M is as defined above in formula (III); R₆ represents a substituted or unsubstituted alkyl group; X₅ represents a hydrogen atom, an acyl group, an alkyl group, an alkoxy group or a halogen atom.

In formula (III), the acyl group represented by R₃ preferably includes an aliphatic or aromatic acyl group having from 2 to 18 carbon atoms, and more preferably from 2 to 13 carbon atoms. Suitable substituents for the acyl group preferably include an alkyl group, an alkoxy group, an aryl group, an aryloxy group, and a halogen atom. Specific examples of the acyl group include an acetyl group, a propionyl group, a butyryl group, an isobutyryl group, a valeryl group, a lauroyl group, a myristoyl group, an acryloyl group, a methacryloyl group, a benzoyl group, a toluoyl group, a naphthoyl group, a chlorobenzoyl group, a methoxybenzoyl group, a hexanoyl group, a heptanoyl group, a decanoyl group, a phenoxyacetyl group, a phenylacetyl group and a naphthyoxyacetyl group.

20 The substituted amino group represented by R₃ in formula (III) preferably includes an acylamino group, an arylsulfonylamino group, an alkylaminocarbonylamino group, an arylaminocarbonylamino group, a dialkylamino group, and an alkylarylamino group, each of which may have from 2 to 18 carbon atoms.

In formulae (III) and (IV), X₃ preferably represents a hydrogen atom, an alkyl group having from 1 to 18 carbon atoms, an alkoxy group having from 1 to 20 carbon atoms, a phenyl group, a chlorine atom or a fluorine atom.

M in formulae (III), (IV), (V) and (VI) preferably represents a hydrogen atom, zinc, aluminum, magnesium or calcium.

30 Specific but non-limiting examples of the compounds represented by formula (III) wherein R₃ is an acyl group are 5-heptanoylsalicylic acid, 5-decanoylsalicylic acid, 5-lauroylsalicylic acid, 5-benzoyl salicylic acid, 5-toluoylsalicylic acid, 5-phenoxyacetyl salicylic acid, 5-phenylacetyl salicylic acid, 3-methyl-5-benzoyl salicylic acid, 3-methyl-5-phenylacetyl salicylic acid, 3-methyl-5-phenoxyacetyl salicylic acid, and metal salts thereof. These salicylic acid derivatives may be used either individually or in combination.

35 Specific but non-limiting examples of the compounds represented by formula (III) wherein R₃ is a substituted amino group are 4-myristoylaminosalicylic acid, 4-decanoylaminosalicylic acid, 4-phenylacetylaminosalicylic acid, 4-phenoxyacetylaminosalicylic acid, 4-benzoylaminosalicylic acid, 4-toluoylaminosalicylic acid, 4-N-stearylcarbamoylaminosalicylic acid, 4-N-phenylcarbamoylaminosalicylic acid, 4-p-toluenesulfonylaminosalicylic acid, 4-dibenzylaminosalicylic acid, 5-myristoylaminosalicylic acid, 4-phenylacetylaminosalicylic acid, and metal salts thereof. These salicylic acid derivatives may be used either individually or in combination.

40 In formula (IV), the aryloxymethyl group represented by R₄ preferably contains from 7 to 18 carbon atoms, and more preferably from 7 to 16 carbon atoms. m preferably represents 1 or 2.

Specific examples of the aryloxymethyl group include a phenoxyethyl group, a tolyloxyethyl group, an ethylphenoxyethyl group, a propylphenoxyethyl group, a butylphenoxyethyl group, an octylphenoxyethyl group, a nonylphenoxyethyl group, a phenylphenoxyethyl group, a cumylphenoxyethyl group, a naphthyoxyethyl group, a chlorophenoxyethyl group, a dimethylphenoxyethyl group, a p-methoxyphenoxyethyl group, a p-ethoxyphenoxyethyl group.

45 Specific but non-limiting examples of the compounds represented by formula (IV) are 5-tolyloxyethylsalicylic acid, 5-butylphenoxyethylsalicylic acid, 5-p-methoxyphenoxyethylsalicylic acid, 5-cumylphenoxyethylsalicylic acid, 5-phenylphenoxyethylsalicylic acid, 3-methyl-5-tolyloxyethylsalicylic acid, 3-methyl-5-ethylphenoxyethylsalicylic acid, 3-methyl-5-methoxyphenoxyethylsalicylic acid, 3-methyl-5-naphthyoxyethylsalicylic acid, 3-methyl-5-cumylphenoxyethylsalicylic acid, 3,5-bisphenoxyethylsalicylic acid, 3,5-bistolyloxyethylsalicylic acid, 3,5-bisethylphenoxyethylsalicylic acid, 3,5-bispropylphenoxyethylsalicylic acid, 3,5-bisoctylphenoxyethylsalicylic acid, 3,5-bisphenylphenoxyethylsalicylic acid, 3,5-biscumylphenoxyethylsalicylic acid, 3,5-bischlorophenoxyethylsalicylic acid, 3,5-bismethoxyphenoxyethylsalicylic acid, 3,5-bisdimethylphenoxyethylsalicylic acid, 3,5-bisethoxyphenoxyethylsalicylic acid, and metal salts thereof. These salicylic acid derivatives may be used individually or in combination.

50 In formula (V), the alkyl group represented by R₅ may be saturated or unsaturated and cyclic or acyclic. Suitable substituents for the alkyl group include an aryl group, an alkoxy group, an aryloxy group, a halogen atom, an acylamino group, an aminocarbonyl group, a cyano group.

55 The aryl group as represented by R₅ includes a phenyl group, a naphthyl group, and a heterocyclic group. Substituents for the aryl group include an alkyl group, an alkoxy group, an aryloxy group, a halogen atom, a nitro group, a cyano group, a substituted carbamoyl group, a substituted sulfamoyl group, a substituted amino group, a substituted oxycarbonyl group, a substituted oxy sulfonyl group, a thioalkoxy group, an arylsulfonyl group, a phenyl group.

60 R₅ preferably represents an alkyl group having from 1 to 30 carbon atoms or an aryl group having from 6 to

24 carbon atoms.

X_4 preferably represents a hydrogen atom, an alkyl group having from 1 to 9 carbon atoms, an alkoxy group having from 1 to 5 carbon atoms, a chlorine atom or a fluorine atom.

The preferred substituents for the alkyl group are an aryl group, an alkoxy group, a halogen atom, an aryloxy group, and an acylamino group.

The preferred substituents for the aryl group are an alkyl group, an alkoxy group, a halogen atom, a phenyl group, and a substituted carbamoyl group, with an aryloxyalkyl group being particularly preferred. In this case, the more preferred R_5 is represented by $-(C_pH_{2p}-O)_q-Ar$, wherein Ar represents a substituted or unsubstituted aryl group, preferably having from 6 to 22 carbon atoms; p represents an integer of from 1 to 10, and preferably from 2 to 4; and q represents an integer of from 1 to 3, and preferably 1 or 2.

The aryl group represented by Ar may have one or more substituents selected from an alkyl group having from 1 to 12 carbon atoms, an aralkyl group having from 7 to 16 carbon atoms, an alkoxy group having from 1 to 12 carbon atoms, a halogen atom, a phenyl group, an alkoxy carbonyl group.

Preferred examples of the aryl group represented by Ar include a phenyl group, a tolyl group, an ethylphenyl group, a propylphenyl group, a butylphenyl group, a cyclohexyl group, an octylphenyl group, a nonylphenyl group, a dodecylphenyl group, a benzylphenyl group, a phenethylphenyl group, a cumylophenyl group, a xylyl group, a diphenethylphenyl group, a methoxyphenyl group, an ethoxyphenyl group, a benzyloxyphenyl group, an octyloxyphenyl group, a dodecyloxyphenyl group, a chlorophenyl group, a fluorophenyl group, a phenylphenyl group, a hexyloxy carbonylphenyl group, a benzyloxy carbonylphenyl group, a dodecyloxycarbonylphenyl group, a naphthyl group, a methyl naphthyl group, a chloronaphthyl group.

The substituent OR_5 in formula (V) is preferably bonded to the para-position with respect to the carboxyl group.

The salicylic acid derivatives represented by formula (V) preferably contain 13 or more total carbon atoms, and more preferably contain 16 or more total carbon atoms, from the standpoint of ensuring water insolubility.

Specific but non-limiting examples of the compounds of formula (V) are 4-hexyloxy salicylic acid, 4-cyclohexyloxy salicylic acid, 4-octyloxy salicylic acid, 4-decyloxy salicylic acid, 4-dodecyloxy salicylic acid, 4-tetradecyloxy salicylic acid, 4-pentadecyloxy salicylic acid, 4-hexadecyloxy salicylic acid, 4-octadecyloxy salicylic acid, 4-eicosyloxy salicylic acid, 4-triacontyloxy salicylic acid, 4-oleyoxy salicylic acid, 4- β -phenethoxy salicylic acid, 4- β -dodecyloxy ethoxy salicylic acid, 4-(12-chlorododecyl)oxysalicylic acid, 4- β -N-stearoylaminoethoxy salicylic acid, 4- β -N-myristoylaminoethoxy salicylic acid, 4- β -perfluorohexylethoxy salicylic acid, 4-dodecyloxy-5-chlorosalicylic acid, 4-dodecyloxy-5-methylsalicylic acid, 4-dodecyloxy-6-methylsalicylic acid, 4-dodecyloxy-6-phenylsalicylic acid, 4-methoxy-6-dodecyloxy salicylic acid, 6-octadecyloxy salicylic acid, 4-p-t-octylphenyloxy salicylic acid, 4-p-dodecyloxyphenyloxy salicylic acid, 4-p-chlorophenoxy-6-butylsalicylic acid, 4-p-phenylphenoxy salicylic acid, 4-p-N-myristoylcarbamoylphenyloxy salicylic acid, 4-benzyloxy-6-dodecyloxy salicylic acid, 4- β -phenoxyethoxy salicylic acid, 4-(4-phenoxybutoxy) salicylic acid, 4-(6-phenoxyhexyloxy) salicylic acid, 4-(5-phenoxyamyoxy) salicylic acid, 4-(8-phenoxyoctyloxy) salicylic acid, 4-(10-phenoxydecyloxy) salicylic acid, 4- β -p-tolyloxyethoxy salicylic acid, 4- β -m-tolyloxyethoxy salicylic acid, 4- β -p-ethylphenoxyethoxy salicylic acid, 4- β -p-isopropylphenoxyethoxy salicylic acid, 4-8-p-t-butylphenoxyethoxy salicylic acid, 4- β -p-cyclohexylphenoxyethoxy salicylic acid, 4- β -p-t-octylphenoxyethoxy salicylic acid, 4- β -p-nonylphenoxyethoxy salicylic acid, 4- β -p-dodecylphenoxyethoxy salicylic acid, 4- β -p-benzylphenoxyethoxy salicylic acid, 4-(2-p- α -phenethylphenoxyethoxy) salicylic acid, 4- β -p-methoxyphenoxyethoxy salicylic acid, 4- β -p-cumyloxyethoxy salicylic acid, 4- β -(2,4-dimethylphenoxy)ethoxy salicylic acid, 4- β -(3,4-dimethylphenoxy)ethoxy salicylic acid, 4- β -(3,5-dimethylphenoxy)ethoxy salicylic acid, 4- β -(2,4-bis- α -phenethylphenoxy)ethoxy salicylic acid, 4- β -p-methoxyphenoxyethoxy salicylic acid, 4- β -ethoxyphenoxyethoxy salicylic acid, 4- β -p-benzylphenoxyethoxy salicylic acid, 4- β -p-dodecyloxyphenoxyethoxy salicylic acid, 4- β -p-chlorophenoxyethoxy salicylic acid, 4- β -p-phenylphenoxyethoxy salicylic acid, 4- β -p-cyclohexylphenoxyethoxy salicylic acid, 4- β -p-benzylphenoxyethoxy salicylic acid, 4- β -naphthyl(2)-oxyethoxy salicylic acid, 5- β -p-ethylphenoxyethoxy salicylic acid, 4- β -phenoxyethoxy-6-methylsalicylic acid, 4- β -phenoxyethoxy-6-chlorosalicylic acid, 4- β -phenoxyisopropyl oxy salicylic acid, 4- ω -p-methoxyphenoxy-3-oxa-n-pentyl oxy salicylic acid. These salicylic acid derivatives may be used either individually or in combination.

In formula (VI), the alkyl group represented by R_6 may be saturated or unsaturated and cyclic or acyclic. Suitable substituents for the alkyl group include an aryl group, an alkoxy group, an aryloxy group, a halogen atom, an acylamino group, an aminocarbonyl group, a cyano group, an alkoxy carbonyl group. Of these substituents, suitable aryl groups include a phenyl group, a naphthyl group, and a heterocyclic group, which may further be substituted with an alkyl group, an alkoxy group, an aryloxy group, a halogen atom, a nitro group, a cyano group, a substituted carbamoyl group, a substituted sulfamoyl group, a substituted amino group, a substituted oxycarbonyl group, a substituted oxysulfonyl group, a thioalkoxy group, an arylsulfonyl group and phenyl group, if desired.

R_6 preferably represents an alkyl group having from 1 to 22 carbon atoms. X_5 preferably represents a hydrogen atom, an alkyl group having from 1 to 9 carbon atoms, an alkoxy group having from 1 to 5 carbon atoms, a chlorine atom or a fluorine atom. Preferred substituents for the alkyl group represented by R_6 are an aryl group having from 6 to 12 carbon atoms, an aryloxy group having from 6 to 16 carbon atoms, an alkoxy group having from 1 to 12 carbon atoms, a halogen atom, and an alkoxy carbonyl group.

The naphthoic acid derivatives of formula (VI) preferably contain 14 or more total carbon atoms, and more

preferably 16 or more total carbon atoms, from the standpoint of ensuring water-insolubility.

Specific but non-limiting examples of the compounds of formula (VI) include 1-hydroxy-4-benzyloxy-2-naphthoic acid, 1-hydroxy-4-dodecyloxy-2-naphthoic acid, 1-hydroxy-4-octadecyloxy-2-naphthoic acid, 1-hydroxy-4- β -phenoxyethoxynaphthoic acid, 1-hydroxy-4- β -p-tolyloxyethoxy-2-naphthoic acid, 1-hydroxy-5-benzyloxy-2-naphthoic acid, 1-hydroxy-5-dodecyloxynaphthoic acid, 2-hydroxy-5-benzyloxy-3-naphthoic acid and zinc, aluminum or calcium salts thereof. These naphthoic acid derivatives may be used either individually or in combination.

Suitable metal compounds to be used in combination with the color developers described above include an oxide, a hydroxide, a sulfide, a carbonate, a phosphate, a silicate, a halide, a halide complex salt, a sulfate or a nitrate of a metal selected from divalent or trivalent metals, such as zinc, magnesium, barium, calcium, aluminum, tin, titanium, nickel, cobalt, manganese, and iron, with zinc compounds being particularly preferred.

Specific examples of such metal compounds are zinc oxide, zinc hydroxide, zinc aluminate, zinc sulfide, zinc carbonate, zinc phosphate, zinc silicate, zinc cyanide, zinc hexacyanoferrate, aluminum oxide, magnesium oxide, titanium oxide, aluminum hydroxide, and aluminum silicate. Preferred among these metal compounds are sparingly water-soluble compounds, and more preferred are sparingly water-soluble zinc compounds.

The amount of the metal compound to be used preferably ranges from about 0.05 to about 10 mols, and more preferably from 0.10 to 8 mols, per mol of the color developer.

The mode of addition of these metal compounds is not particularly restricted. It is desirable that the color developer and the metal compound be dispersed in an aqueous medium by means of a ball mill, a sand mill, etc., or a mixture of the salicylic acid derivative and the metal compound be mixed and ground in a dry grinder, e.g., a jet mill, and then dispersed in a Kedy mill, a dissolver, etc. It is particularly preferred that at least about 80% by weight of the metal compound to be added to a recording layer be mixed and dispersed with the salicylic acid derivative in the manner as described above.

The dispersion of the color developer and the metal compound is preferably maintained in an alkaline condition, i.e., at a pH of about 7.0 or higher, throughout the dispersion step. To this effect, sodium hydroxide, aqueous ammonia or the like may be added to the system in an amount sufficient to effect the desired pH adjustment. For ensuring color formation sensitivity, dispersion of the mixture in a sand mill, etc., is preferably carried out until the dispersed particles have a particle size of about 3 μm or less, and more preferably 2 μm or less. Further, in order to facilitate size reduction and to manifest the effect of the metal compound addition, the particle size of the metal compound to be mixed and dispersed is preferably as small as possible, usually 2 μm or smaller. In particular, metal oxides which are obtained by the reducing calcination of a mineral and combustion oxidation of the resulting gaseous metal with air, such as zinc oxide, are preferred because of their very small particle size.

The heat-sensitive recording materials comprising at least one of the above-described color developers and metal compounds according to the present invention provide color images exhibiting sufficient color density, marked stability, and substantial freedom from discoloration even when exposed to light, heat or moisture for an extended period of time and are, therefore, particularly advantageous in terms of long-term preservability of recorded images. In addition, the heat-sensitive recording materials according to the present invention are free from disadvantages often encountered with conventional heat-sensitive recording materials, such as fog generation on the white background due to solvents, etc., or discoloration of the color images due to contact with fats, oils, chemicals, etc.

If desired, the color developers according to the present invention may be used in combination with one or more known color developers, such as salicylic acid derivatives other than as described above in formulae (I) to (VI), phenol derivatives, phenolic resins, acid clay, and the like. Such known color developers include phenol derivatives, e.g., 4-t-butylphenol, 4-phenylphenol, 4-hydroxydiphenoxide, α -naphthol, β -naphthol, hexyl 4-hydroxybenzoate, 2,2'-dihydroxybiphenyl, 2,2'-bis(4-hydroxyphenyl)propane (bisphenol A), 4,4'-isopropylidenebis(2-methylphenol), 1,1'-bis(3-chloro-4-hydroxyphenyl)cyclohexane, 1,1-bis(3-chloro-4-hydroxyphenyl)-2-ethylbutane, 4,4'-sec-isooctylidenediphenol, 4-t-octylphenol, 4,4'-sec-butylidenediphenol, 4-p-methylphenylphenol, 4,4'-isopentylidenediphenol, 4,4'-methylcyclohexylidenediphenol, 4,4'-dihydroxydiphenyl sulfide, 1,4-bis(4'-hydroxycumyl)benzene, 1,3-bis(4'-hydroxycumyl)benzene, 4,4'-thiobis(6-t-butyl-3-methylphenol), 4,4'-dihydroxydiphenylsulfone, hydroquinone monobenzyl ether, 4-hydroxybenzophenone, 2,4-dihydroxybenzophenone, polyvinylbenzyloxycarbonylphenol, 2,4,4'-trihydroxybenzophenone, 2,2',4,4'-tetrahydroxybenzophenone, dimethyl 4-hydroxyphthalate, methyl 4-hydroxybenzoate, 2,4,4'-trihydroxydiphenylsulfone, 1,5-bis-p-hydroxyphenylpentane, 1,6-bis-p-hydroxyphenoxy hexane, tolyl 4-hydroxybenzoate, α -phenylbenzyl 4-hydroxybenzoate, phenylpropyl 4-hydroxybenzoate, phenethyl 4-hydroxybenzoate, p-chlorobenzyl 4-hydroxybenzoate, p-methoxybenzyl 4-hydroxybenzoate, benzyl 4-hydroxybenzoate, m-chlorobenzyl 4-hydroxybenzoate, β -phenethyl 4-hydroxybenzoate, 4-hydroxy-2',4'-dimethylidiphenylsulfone, β -phenethyl orsellinate, cinnamyl orsellinate, o-chlorophenoxyethyl orsellinate, o-ethylphenoxyethyl orsellinate, o-phenylphenoxyethyl orsellinate, m-phenylphenoxyethyl orsellinate, β -3'-t-butyl-4'-hydroxyphenoxethyl 2,4-dihydroxybenzoate, 1-t-butyl-4-p-hydroxyphenylsulfonyloxybenzene, 4-N-benzylsulfamoylphenol, p-methylbenzyl 2,4-dihydroxybenzoate, β -phenoxyethyl 2,4-dihydroxybenzoate, benzyl 2,4-dihydroxy-6-methylbenzoate, methyl bis-4-hydroxyphenylacetate, ditolythiourea, and 4,4'-diacetylidiphenylthiourea; aromatic carboxylic acid derivatives, e.g., 3-phenylsalicylic acid, 3-cyclohexylsalicylic acid, 3,5-di-t-butylsalicylic acid, 3,5-didodecylsalicylic acid, 3-methyl-5-benzylsalicylic acid, 3-phenyl-5-(α,α -dimethylbenzyl)salicylic acid, 2-phenyl-5-(α,α -dimethylbenzyl)salicylic acid, 3,5-di(α -methylbenzyl)salicylic acid, 5-t-octylsalicylic acid,


3,5-di-t-butylsalicylic acid, 3-chloro-5-cumylsalicylic acid, 3-methyl-5-t-octylsalicylic acid, 3-methyl-5- α -methylbenzylsalicylic acid, 3-methyl-5-cumylsalicylic acid, 3,5-di-t-amylsalicylic acid, 3-phenyl-5-benzylsalicylic acid, 3-phenyl-5-t-octylsalicylic acid, 3-phenyl-5- α -methylbenzylsalicylic acid, 3,5-di-t-octylsalicylic acid, 3,5-bis(α -methylbenzyl)salicylic acid, 3,5-dicumylsalicylic acid, 4'-methyl-5-(α -methylbenzyl)salicylic acid, 4-methyl-5-cumylsalicylic acid, 3-(α -methylbenzyl)-6-methylsalicylic acid, 3-(α -methylbenzyl)-6-phenylsalicylic acid, 3-triphenylmethylsalicylic acid, 3-diphenylmethylsalicylic acid, 4-n-dodecylsalicylic acid, 4-t-dodecylsalicylic acid, 4-n-pentadecylsalicylic acid, 4-n-heptadecylsalicylic acid, 5-(1,3-diphenylbutyl)salicylic acid, 5-n-octadecylsalicylic acid, 5-dodecylsulfonylsalicylic acid, 5-dodecylsulfosalicylic acid, 3-methyl-5-dodecylsulfosalicylic acid, and 3,5-dicyclopentadlenylsalicylic acid; phenolic resins, e.g., a p-phenylphenol-formalin resin, a p-butylphenol-acetone resin, etc.; and salts of these organic color developers with polyvalent metals, e.g., zinc, magnesium, aluminum, calcium, titanium, manganese, tin, nickel. Examples of inorganic color developers which can also be used in the present invention are inorganic acids, such as hydrohalogenetic acids (e.g., hydrochloric acid, hydrobromic acid, and hydroiodic acid), boric acid, silicic acid, phosphoric acid, sulfuric acid, nitric acid, perchloric acid, and halides of aluminum, zinc, nickel, tin, titanium or boron; acid clay, active clay, attapulgite, bentonite, colloidal silica, aluminum silicate, magnesium silicate, zinc silicate, tin silicate, zinc rhodanide, zinc chloride, iron stearate, cobalt naphthenate, nickel peroxide, ammonium sulfate. In addition, aliphatic carboxylic acids, e.g., oxalic acid, maleic acid, tartaric acid, citric acid, succinic acid, stearic acid, etc., benzolic acid, p-t-butylbenzoic acid, phthalic acid, gallic acid, may also be used in combination.

In the recording materials according to the present invention, the color developers are preferably used in a total amount of from about 50 to about 800%, and more preferably from 100 to 500%, by weight based on the amount of the color formers. It is preferred to use the aforesaid known color developers in an amount of from about 10 to about 2,000% by weight based on the salicylic acid or naphtholic acid derivatives of formulae (I) to (VI) according to the present invention.

Color formers which can be used in the present invention include triphenylmethanephthalide compounds, fluoran compounds, phenothiazine compounds, Indolylphthalide compounds, Leuco Auramine compounds, Rhodamine lactam compounds, triphenylmethane compounds, triazene compounds, spiropyran compounds, and the like.

5 thyl-N-(isopropyl) aminofluoran, 2-(p-methylanilino)-3-chloro-6-N-methyl-N-cyclohexylaminofluoran, 2-(p-me-
 thylanilino)-3-chloro-6-N-methyl-N-pentylaminofluoran, 2-(p-methylanilino)-3-chloro-6-N-ethyl-N-pentylami-
 nofluoran, 2-anilino-3-methyl-6-N-methyl-N-furylmethylaminofluoran, 2-anilino-3-ethyl-6-N-methyl-N-furylme-
 thylaminofluoran, etc.; thiazine compounds, e.g., benzoyl Leucomethylene Blue, p-nitrobenzoyl Leuco-
 methylene Blue, etc.; spiro compounds, e.g., 3-methyl-spiro-dinaphthopyran, 3-ethyl-spirodinaphthopyran,
 3,3'-dichloro-spiro-dinaphthopyran, 3-benzyl-spiro-dinaphthopyran, 3-methyl-naphtho-(3-meth-
 oxybenzo)-spiropyran, 3-propyl-spiro-dibenzopyran, 3-phenyl-7-dibenzylamino-2,2'-spiro-di[2H-1-benzopy-
 ran], 3,3-bis(4-dimethylaminophenyl)-6-dimethylaminophthalide, etc.; indolylphthalides, e.g., 3,3-bis(1-ethyl-
 10 2-methylindol-3-yl)phthalide, 3,3-bis(1-octyl-2-methylindol-3-yl)phthalide, 3-(ethoxy-4-diethylaminoph-
 enyl)-3-(1-ethyl-2-methylindol-3-yl)phthalide, 3-(2-ethoxy-4-dibutylaminophenyl)-3-(1-ethyl-2-methylindol-
 15 3-yl)phthalide, 3-(2-amyoxy-4-diethylaminophenyl)-3-(1-ethyl-2-methylindol-3-yl)phthalide, 3-(2-ethoxy-4-di-
 ethylaminophenyl)-3-(1-octyl-2-methylindol-3-yl)phthalide, etc.; pyridine compounds, e.g., 3-(2-ethoxy-4-di-
 ethylaminophenyl)-3-(1-octyl-2-methylindol-3-yl)-4- or 7-azaphthalide, 3-(2-ethoxy-4-diethylaminophenyl)-3-
 (1-ethyl-2-methylindol-3-yl)-4- or 7-azaphthalide, 3-(2-hexyloxy-4-diethylaminophenyl)-3-(1-ethyl-2-methylindol-
 20 3-yl)-4- or 7-azaphthalide, 3-(2-ethoxy-4-diethylaminophenyl)-3-(1-ethyl-2-phenylindol-3-yl)-4- or 7-azaph-
 thalide, 3-(2-butoxy-4-diethylaminophenyl)-3-(1-ethyl-2-phenylindol-3-yl)-4- or 7-azaphthalide, 3-(2-ethoxy-
 4-diethylaminophenyl)-3-(1-octyl-2-phenylindol-3-yl)-4- or 7-azaphthalide, etc.; and fluorene compounds, e.g.,
 3',6'-bisdiethylamino-5-diethylaminospiro(isobenzofuran-1,9'-fluoren)-3-one, 3',6'-bisdiethylamino-7-diethyl-
 amino-2-methylspiro(1,3-benzoxazine-4,9'-fluoren), 3',6'-bisdiethylamino-7-diethylaminospiro(2-hydro-
 25 1,3-benzoxazine-4,9'-fluoren)-2-one, etc.

Preferred among the above-described color formers are triarylmethane compounds (e.g., Crystal Violet Lactone) and xanthene compounds because of less generation of fog and their ability to provide high color density. Even more preferred are xanthene compounds represented by formula (VII):

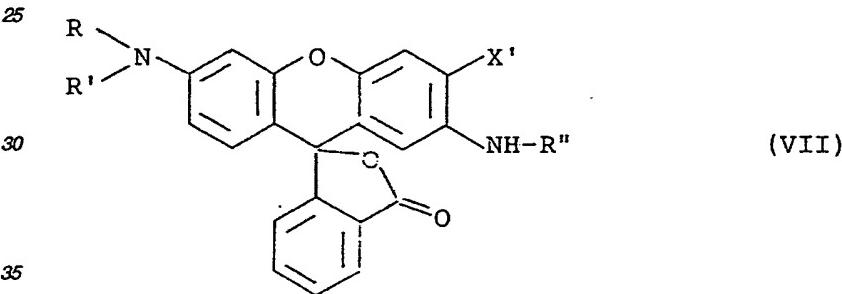

40 wherein R and R' each represents a substituted or unsubstituted, straight or branched chain or cyclic alkyl group preferably having from 1 to 10 carbon atoms, or R and R' join together to form a 5- to 7-membered heterocyclic ring; R'' represents an aryl group, preferably having from 6 to 20 carbon atoms, and R'' more preferably represents a substituted or unsubstituted phenyl group, wherein the substituent preferably includes an alkyl group having from 1 to 10 carbon atoms; and X' represents an alkyl group, preferably having from 1 to 10 carbon atoms, or a halogen atom.

45 The above-described known color formers may be used either individually or, for the purpose of tone control and discoloration inhibition, in combinations of two or more.

Methods for producing the recording materials according to the present invention, as well as various useful additives therefor, are described below referring to particular forms of recording materials.


50 The heat-sensitive recording materials to which the present invention may be applied include various embodiments as described in West German Patent Applications (OLS) Nos. 2,228,581 and 2,110,854 and Japanese Patent Publication No. 20142/77. In the production of the heat-sensitive recording materials, each of the color former and the color developer is finely dispersed in a dispersing medium to a particle size of not more than about 10 μm , and preferably not more than 3 μm by means of a ball mill, a sand mill, a horizontal sand mill, an attritor, a colloid mill, etc. Generally employed dispersing media are aqueous solutions of water-soluble high molecular weight polymers in concentrations of from about 0.5 to about 10% by weight.

55 The weight ratio of the color former to the color developer to be used preferably ranges from about 1:10 to about 1:1, and more preferably from 1:5 to 2:3.


It is preferred that a heat-sensitive recording layer further contains a heat-fusible substance in order to improve thermal response properties. Preferred heat-fusible substances include those represented by the following formulae (VIII) to (XIII):

60


65



(VIII)



(IX)

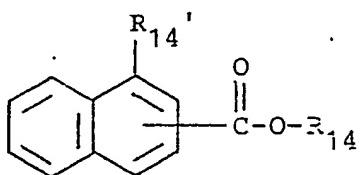

(X)

15



(XI)

30




(XII)

35

wherein R₁₁, R₁₂, R₁₃, and R₁₄ each represents a phenyl group, a benzyl group, which may be substituted with a lower alkyl group having from 1 to 8 carbon atoms, preferably from 1 to 3 carbon atoms, or which may be substituted with a halogen atom, preferably a fluorine atom; R₁₅ and R₁₆ each represents an alkyl group having from 12 to 24 carbon atoms; R₁₇ represents a hydrogen atom or a phenyl group; and R_{14'} represents a hydrogen atom or a hydroxyl group;

40

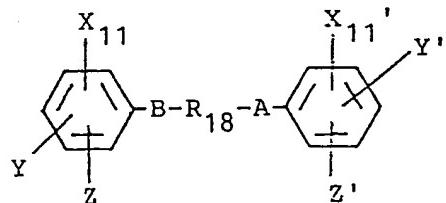

(XIII)

45

50

wherein R₁₈ represents a divalent group, preferably an alkylene group, an alkylene group having a carbonyl group, an alkylene group having a halogen atom or an alkylene group having an unsaturated bond, and more preferably an alkylene group or an alkylene group having an ether linkage; X₁₁, Y, Z, X_{11'}, Y', and Z', which may be the same or different, each represents a hydrogen atom, a halogen atom, an alkoxy carbonyl group or an aralkoxy carbonyl group; and A and B, which may be the same or different, each represents an oxygen atom or a sulfur atom.

55

The compounds represented by formulae (VIII) to (XIII) preferably have a melting point of from about 70 to about 150°C, and more preferably from 80 to 130°C.

60

Specific examples of these heat-fusible substances are benzyl p-benzyloxybenzoate (m.p. = 119°C), β-naphthyl benzyl ether (m.p. = 105°C), stearamide (m.p. = 108°C), palmitamide (m.p. = 103°C), N-phenylstearamide (m.p. = 96°C), N-benzylphenylacetic amide (m.p. = 122°C), N-stearylurea (m.p. = 110°C),

65

phenyl β -naphthoate (m.p. = 92°C), phenyl 1-hydroxy-2-naphthoate (m.p. = 92°C), β -naphthol p-chlorobenzyl ether (m.p. = 115°C), β -naphthol p-methylbenzyl ether (m.p. = 96°C), α -naphthyl benzyl ether (m.p. = 76°C), 1,4-butanediol p-methylphenyl ether (m.p. = 93°C), 1,4-propanediol pmethylphenyl ether (m.p. = 93°C), 1,4-butanediol p-isopropylphenyl ether (m.p. = 79°C), 1,4-butanediol p-t-octylphenyl ether (m.p. = 99°C), 2-phenoxy-1-p-tolyloxyethane (m.p. = 104°C), 1-phenoxy-2-(4-ethylphenoxy)ethane (m.p. = 106°C), 1-phenoxy-2-(4-chlorophenoxy)ethane (m.p. = 77°C), 1,4-butanediol phenyl ether (m.p. = 98°C), and diethylene glycol bis(4-methoxyphenyl)ether (m.p. = 101°C).

The heat-fusible substances may be used either individually or in combination. In order to obtain sufficient thermal response sensitivity, the heat-fusible substance is preferably used in an amount of from about 10 to about 200%, more preferably from 20 to 150%, by weight based on the amount of the color developer.

The heat-sensitive recording layer contains a water-soluble binder. Suitable binders include compounds having a solubility of at least 5% by weight in water at 25°C. Specific examples of the binder are polyvinyl alcohol, methyl cellulose, carboxymethyl cellulose, hydroxyethyl cellulose, starches (inclusive of modified starch), gelatin, gum arabic, casein, styrene-maleic anhydride copolymer hydrolysis products, ethylene-maleic anhydride copolymer hydrolysis products, Isobutylene-maleic anhydride copolymer hydrolysis products, carboxy-modified polyvinyl alcohol, polyacrylamide, vinyl acetate-polyacrylic acid copolymer saponification products, etc. These binders may also serve as a medium into which the color former, color developer, and heat-fusible substance may be dispersed.

If desired, the heat-sensitive recording layer can further contain pigments, water-insoluble binders, metallic soaps, waxes, surface active agents, and the like.

Suitable pigments include calcium carbonate, barium sulfate, lithopone, talc, agalmatolite, kaolin, silica, amorphous silica, etc. Preferred pigments include precipitated calcium carbonate, kaolin, surface-treated amorphous silica, and aluminum hydroxide.

Suitable water-insoluble binders include synthetic rubber latices and synthetic resin emulsions such as a styrene-butadiene rubber latex, an acrylonitrile-butadiene rubber latex, a methyl acrylate-butadiene rubber latex, a vinyl acetate emulsion, etc. In order to prevent fog, it is desirable that the amount of a surface active agent to be added to the rubber latex or emulsion be as small as possible, and a so-called soap-free rubber latex or emulsion is preferred.


Suitable metallic soaps include higher fatty acid metal salts. Emulsions of zinc stearate, calcium stearate, aluminum stearate, and the like are usually employed.

Suitable waxes include emulsions of paraffin wax, microcrystalline wax, carnauba wax, methyloleostearamide, a polyethylene wax, a polystyrene wax, etc.


Suitable surface active agents include alkali metal salts of sulfosuccinic acid compounds and fluorine-containing surface active agents.

For the purpose of ensuring fastness of recorded color images, it is preferred to incorporate a discoloration inhibitor that prevents the color image fading into the heat-sensitive recording layer.

Suitable discoloration inhibitors include phenol derivatives, and particularly hindered phenol compounds. Preferred discoloration inhibitors are represented by the following formulae (XIV) to (XVII):

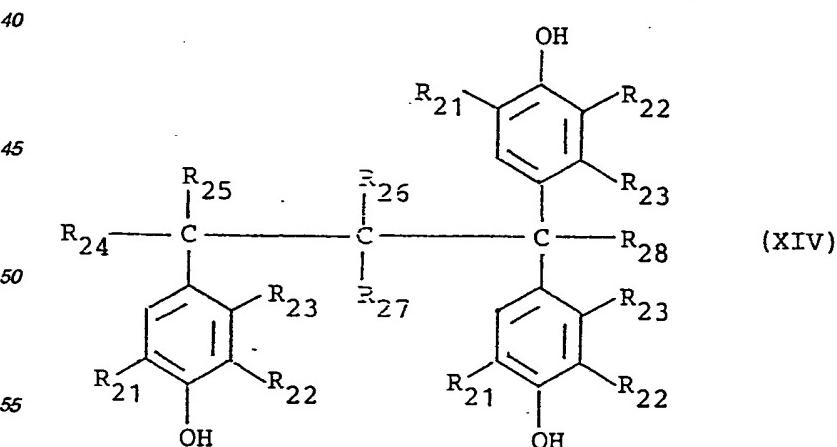

60 wherein R₂₁ represents a branched alkyl group having from 3 to 8 carbon atoms; R₂₂ represents a hydrogen atom or a branched alkyl group having from 3 to 8 carbon atoms; R₂₃ represents a hydrogen atom or an alkyl group having from 1 to 3 carbon atoms; R₂₄ represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms; R₂₅, R₂₆ and R₂₇ each represents a hydrogen atom or an alkyl group having from 1 to 3 carbon atoms; and R₂₈ represents an alkyl group having from 1 to 8 carbon atoms;

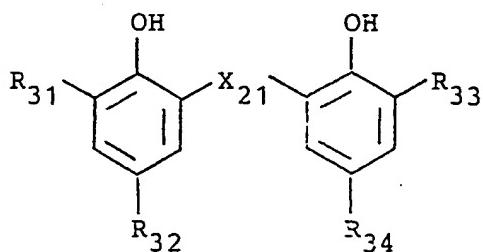


(XV)

5

10

wherein R₃₁ and R₃₃ each represents a branched alkyl group having from 3 to 8 carbon atoms; R₃₂ and R₃₄ each represents an alkyl group having from 1 to 8 carbon atoms; X₂₁ represents S, O, SO₂, S₂,


15



20

a cyclopentylene group or a cyclohexylene group; r represents 0 or an integer of from 1 to 3; and R₃₅ and R₃₆ each represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms;

25

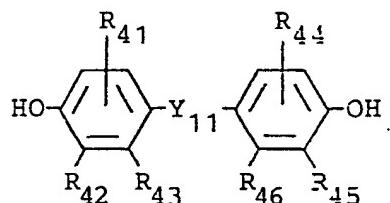


(XVI)

30

35

wherein R₄₁ and R₄₄ each represents a branched alkyl group having from 3 to 8 carbon atoms; R₄₂, R₄₃, R₄₅, and R₄₆ each represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms; Y₁₁ represents S, O, SO₂, S₂, or


40



45

wherein s represents 0 or an integer of from 1 to 3; and R₄₇ and R₄₈ each represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms, or R₄₇ and R₄₈ may be joined together to form a cyclic pentamethylene group;

50

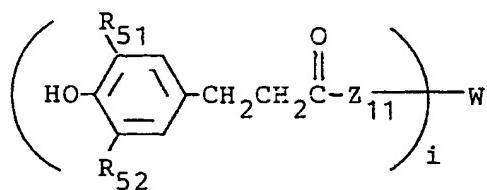

(XVII)


55

60

wherein R₅₁ and R₅₂ each represents a branched alkyl group having from 3 to 8 carbon atoms; Z₁₁ represents -NH-, -O(CH₂)_t-, wherein t represents an integer of from 1 to 5; i represents an integer of from 1 to 4; when

65

i = 1, W represents an alkyl group having from 1 to 18 carbon atoms; when i = 2, W represents S, O,






wherein R₅₃ and R₅₄ each represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms, and j represents 0 or an integer of from 1 to 8; when i = 3, W represents →C-R₅₅, wherein R₅₅ represents a hydrogen atom or an alkyl group having from 1 to 8 carbon atoms;

15 when i = 4, W represents $\begin{array}{c} \text{I} \\ | \\ -\text{C}- \end{array}$.

Typical examples of the phenol derivatives represented by formulae (XIV) to (XVII) are as follows.

- (A) Specific examples of the phenol derivatives represented by formula (XIV) are 1,1,3-tris(2-methyl-4-hydroxy-5-tert-butylphenyl)butane, 1,1,3-tris(2-ethyl-4-hydroxy-5-tert-butylphenyl)butane, 20 1,1,3-tris(3,5-di-tert-butyl-4-hydroxyphenyl)butane, 1,1,3-tris(2-methyl-4-hydroxy-5-tert-butylphenyl)propane, etc.
- (B) Specific examples of the phenol derivatives represented by formula (XV) are 2,2'-methylene-bis(6-tert-butyl-4-methylphenol), 2,2'-methyleno-bis(6-tert-butyl-4-ethylphenol), etc.
- (C) Specific examples of the phenol derivatives represented by formula (XVI) are 4,4'-butyldene-bis(6-tert-butyl-3-methylphenol), 4,4'-thio-bis(3-methyl-6-tert-butylphenol), etc.
- (D) Specific examples of the phenol derivatives represented by formula (XVII) are the following compounds:

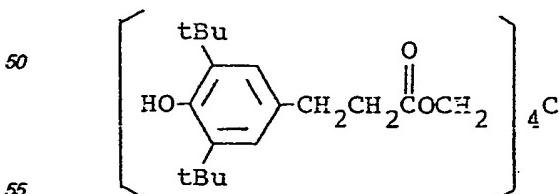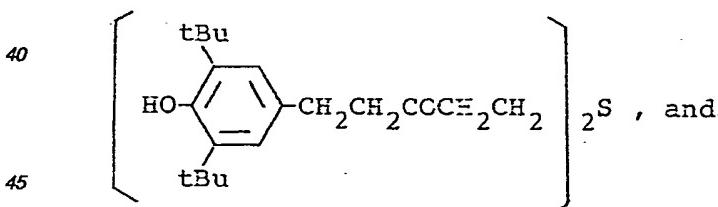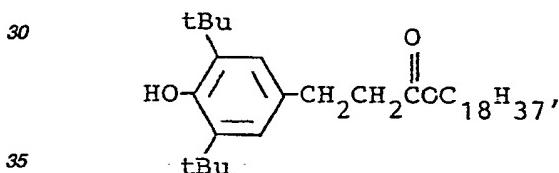

The phenol compounds represented by formulae (XIV) to (XVII) are preferably used in an amount of from about 1 to about 200%, more preferably from 5 to 50%, by weight based on the amount of the color developer.

The above-described components are dispersed into the aforesaid water-soluble binder to prepare a coating composition. The coating composition is applied to a support, such as base paper, fine paper, synthetic paper, a plastic sheet, and neutral paper, to a dry coverage of from about 2 to about 10 g/m².

Durability of the heat-sensitive recording material may be improved by providing a protective layer comprising a water-soluble or water-dispersible polymeric compound, such as polyvinyl alcohol, hydroxyethyl

starch, or epoxy-modified polyacrylamide, and a crosslinking agent to a thickness of from about 0.2 to about 2 μm .

The heat-sensitive recording materials can be subjected to preheating, moisture conditioning, stretching, and the like prior to image recording.

The present invention will now be illustrated in greater detail by way of the following examples and comparative examples, but the present invention is not limited in any manner by these examples. In these examples, all parts, percentages and ratios are by weight.

In evaluations of heat response properties, a test chart No. 3 of Gazo Denshi Gakkai (The Institute of Image Electronics) was copied on heat-sensitive materials by means of a high speed facsimile "FF-2000" manufactured by Fujitsu Ltd., and the image density was measured by the use of a Macbeth densitometer "RD-918".

EXAMPLE 1 AND COMPARATIVE EXAMPLE 1

The salicylic acid derivative color developers and the metal compounds shown in Table 1 were mixed at the mixing ratios shown in Table 1 to prepare Mixtures (1) to (15) according to the present invention. For comparison, Mixtures (16) to (20) were prepared in the same manner, but using a color developer outside the scope of the present invention, as shown in Table 1.

Combinations of color formers, Mixtures (1) to (15), color developers, heat-fusible substances, discoloration inhibitors, and pigments used for sample preparation are shown in Table 2. 20 g each of the materials shown in Table 2 were poured into 100 g of a 5% polyvinyl alcohol ("PVA-105", a trade name, manufactured by Kuraray Co., Ltd.) aqueous solution while stirring and, after thoroughly defoaming, dispersed by means of a sand mill ("Dynomill KDL", a trade name, manufactured by WEB Company) to a volume average particle size of 3 μm or smaller. 80 g of the pigments shown in Table 2 were dispersed by means of a homogenizer together with 160 g of a 0.5% aqueous solution of sodium hexametaphosphate. Further, a 21% dispersion of zinc stearate was prepared.

The thus-prepared dispersions were mixed at the mixing ratios shown in Table 3. The resulting coating composition was coated on fine paper having a basis weight of 50 g/m² with a wire bar to a dry coverage of 7 g/m², and dried in an oven at 50°C to obtain a heat-sensitive recording material. The resulting heat-sensitive recording materials were designated as Samples 101 to 118.

For comparison, Samples A to E were prepared in the same manner as above, except for using each of Mixtures (16) to (20). The mixing ratios of the dispersions are shown in Table 3. Further, Samples F to N were prepared in the same manner as Samples 106 to 114, except for excluding the metal compound from Mixtures (6) to (11) (i.e., dispersions of the salicylic acid derivative alone, hereinafter designated as (6') to (11'), respectively). The mixing ratios of the dispersions are also shown in Table 3.

Each of Samples 101 to 118 and A to N was kept at 60°C and 30% RH (Condition I) or at 40°C and 90% RH (Condition II) for 24 hours, and the sample was evaluated for fog on the white background and heat response properties (density of the color developed area) either before or after being stored under Condition I or II, as well as being evaluated as to the storage life of color images. This storage life was determined by the percentage of color retention obtained by the equation:

$$\text{Color Retention} = \frac{(\text{Density after Storage})}{(\text{Density Immediately after Color Formation})} \times 100$$

The results obtained are shown in Table 4 below.

TABLE 1

Mixture No.	Color Developer (a)	Metal Compound (b)	(b)/(a) Mixing Ratio Molar Ratio
(1)	4-β-phenoxyethoxy-salicylic acid	zinc oxide	6.77
(2)	4-β-p-tolyloxyethoxy-salicylic acid	magnesium oxide	3.60
(3)	4-β-p-methoxyphenoxy-ethoxysalicylic acid	zinc oxide	3.75
(4)	4-β-p-ethylphenoxy-ethoxysalicylic acid	zinc carbonate	1.20
(5)	4-β-p-ethoxyphenoxy-ethoxysalicylic acid	zinc hydroxide	0.28
(6)	4-(8-phenoxyoctyloxy)-salicylic acid	zinc carbonate	1.43
(7)	4-(4-p-t-butylphenoxybutyloxy)salicylic acid	zinc sulfide	1.70
(8)	4-β-p-benzyloxy-carbonylphenoxyethoxy-salicylic acid	aluminum oxide	2.00
(9)	4-β-p-methoxyphenoxy-ethoxysalicylic acid	zinc carbonate	0.15
(10)	4-β-p-methylphenoxy-ethoxysalicylic acid	zinc oxide	1.13
(11)	4-β-p-methoxyphenoxy-ethoxysalicylic acid	zinc oxide	1.88

(cont'd)

<u>Mixture No.</u>	<u>Color Developer (a)</u>	<u>Metal Compound (b)</u>	<u>(b)/(a) Mixing Ratio</u> <u>Molar Ratio</u>
(12)	1-hydroxy-4-β-phenoxyethoxy(2)naphthoic acid	zinc oxide	3.50
(13)	5-phenylacetylaminosalicylic acid	zinc oxide	3.50
(14)	3,5-bis(p-tolyloxy-methyl)salicylic acid	zinc oxide	3.50
(15)	5-myristoylsalicylic acid	zinc oxide	3.50
(16)	2,2-bis(p-hydroxy-phenyl)propane	zinc oxide	6.77
(17)	1,1'-bis(4'-hydroxy-phenyl)cyclopropane	magnesium oxide	3.60
(18)	benzyl 4-hydroxybenzoate	zinc oxide	3.75
(19)	dimethyl 3-hydroxy-o-phthalate	zinc carbonate	1.20
(20)	3,5-di-t-butylsalicylic acid	zinc hydroxide	0.28

TABLE 2

<u>Sample No.</u>	<u>Color Former</u>	<u>Mixture No.</u>	<u>Color Developer</u>	<u>Heat-Fusible Substance</u>	<u>Discoloration Inhibitor</u>	<u>Pigment</u>
101	Crystal Violet Lactone	(1)	none	β -naphthyl benzyl ether	1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl)-butane	calcium carbonate
102	2-anilino-3-chloro-diethylaminofluoran	(2)	none	"	"	"
103	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-methyl-N-cyclohexylamino-fluoran	(3)	none	"	"	"
104	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-ethyl-N-isooamylamino-fluoran	(4)	none	"	"	"
105	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-ethyl-N-furylmethyl-amino-fluoran	(5)	none	"	"	"

(cont'd)

<u>Sample No.</u>	<u>Color Former</u>	<u>Mixture No.</u>	<u>Color Developer</u>	<u>Heat-Fusible Substance</u>	<u>Discoloration Inhibitor</u>	<u>Pigment</u>
106	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-ethyl-N-isoamylamino-fluoran	(6)	2,2-bis(p-hydroxyphenyl)-propane	β -naphthyl benzyl ether	1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl)-butane	1:1 mixture of calcium carbonate and amorphous silica
107	2-anilino-3-methyl-6-N-ethyl-N-isoamylamino-fluoran	(7)	1,1-bis(4'-hydroxyphenyl)-cyclohexane	1-phenoxy-2-(4-ethylphenoxy)-ethane	"	calcium carbonate
108	2-anilino-3-methyl-6-N-ethyl-N-isoamylamino-fluoran	(8)	benzyl 4-hydroxybenzoate	phenyl 1-hydroxy-2-naphthoate	2,2'-methylene-bis(6-t-butyl-4-methylphenol)	"
109	2-anilino-3-methyl-6-diethylaminofluoran	(9)	none	diethylene glycol bis(4-methoxy-phenyl) ether	4,4'-thio-his-(3-methyl-6-t-butylphenol)	calcined kaolin
110	"	(10)	none	β -naphthyl benzyl ether	1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl)-butane	1:1 mixture of calcium carbonate and amorphous silica
111	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-methyl-N-cyclohexylaminofluoran	(11)	1,4-bis(p-hydroxycumyl)-benzene	diethylene glycol bis(4-methoxy-phenyl) ether	none	"
112	2-anilino-3-methyl-6-N-ethyl-N-tetrahydrofurfurylaminofluoran	(11)	none	N-benzylphenyl-acetic amide	none	(cont'd)

<u>Sample No.</u>	<u>Color Former</u>	<u>Mixture No.</u>	<u>Color Developer</u>	<u>Heat-Fusible Substance</u>	<u>Discoloration Inhibitor</u>	<u>Pigment</u>
113	2-anilino-3-methyl-6-N-ethyl-N-tetrahydro-furfurylaminofluoran	(11)	none	diethylene glycol bis(4-methoxy-phenyl) ether	none	1:1 mixture of calcium carbonate and amorphous silica
114	2-anilino-3-methyl-6-diethylaminofluoran	(11)	none	1-phenoxy-2-(4-ethoxyphenoxy)ethane	none	amorphous silica
115	1:1 (by weight) mixture of 2-anilino-3-chloro-6-diethylaminofluoran and 2-anilino-3-methyl-6-N-ethyl-N-isoamylamino-fluoran	(12)	none	2-benzoyloxy-naphthalene	none	calcium carbonate
116	"	(13)	none	"	"	none
117	"	(14)	none	"	"	none
118	"	(15)	none	"	"	none

TABLE 3Weight Mixing Ratio of Dispersions

Sample No.	Color Former Dispersion	Dispersion of Mixture	Color Developer Dispersion	Discoloration		Pigment Dispersion	Zinc Stearate Dispersion
				Heat-Fusible Substance Dispersion	Inhibitor Dispersion		
101	100	(1): 600	0	200	60	480	40
102	100	(2): 325	0	375	0	400	30
103	100	(3): 600	0	600	0	650	50
104	100	(4): 225	0	110	0	260	20
105	100	(5): 275	0	250	0	400	25
106	100	(6): 300	30	230	70	450	30
107	100	(7): 300	60	260	80	480	30
108	100	(8): 375	75	330	100	580	40
109	100	(9): 220	0	170	30	300	20
110	100	(10): 260	0	200	30	350	25
111	100	(11): 300	60	260	40	450	30
112	100	(11): 300	0	200	0	360	25
113	100	(11): 450	0	450	0	500	40
114	100	(11): 300	0	160	0	280	20
115	100	(12): 400	0	200	0	360	25
116	100	(13): 400	0	200	0	360	25
117	100	(14): 400	0	200	0	360	25
118	100	(15): 400	0	200	0	360	25

(cont'd)

Sample No.	Color Former Dispersion	Dispersion of Mixture	Color Developer Dispersion	Heat-Fusible Substance Dispersion		Discoloration Inhibitor Dispersion		Pigment Dispersion		Zinc Stearate Dispersion
				(16):	680	200	60	520	40	
A	100	(17):	385	0	375	0	0	430	35	
B	100	(18):	700	0	600	0	0	700	55	
C	100	(19):	260	0	110	0	0	280	20	
D	100	(20):	280	0	250	0	0	400	25	
E	100	(6'): 200	30	230	70	70	70	375	25	
F	100	(7'): 200	60	260	80	80	80	420	30	
G	100	(8'): 250	75	325	100	100	100	500	35	
H	100	(9'): 200	0	170	30	30	30	300	20	
I	100	(10'): 200	0	200	30	30	30	320	20	
J	100	(11'): 200	60	260	40	40	40	400	25	
K	100	(11'): 200	0	200	0	0	0	300	20	
L	100	(11'): 200	0	450	0	0	0	420	35	
M	100	(11'): 300	0	160	0	0	0	230	20	
N	100	(11'): 200	0							

TABLE 4

Sample No.	Color Density		Background Fog (density)			Color Retention (%)	
	Before Testing	After Testing	Before Testing	After Testing	(II)	(III)	(II)
101	1.12	1.11	1.12	0.07	0.10	0.06	99
102	1.23	1.24	1.23	0.05	0.09	0.06	101
103	1.24	1.25	1.25	0.06	0.08	0.05	101
104	1.23	1.23	1.23	0.07	0.09	0.08	100
105	1.25	1.26	1.26	0.05	0.08	0.07	101
106	1.33	1.35	1.34	0.05	0.11	0.10	102
107	1.32	1.34	1.33	0.08	0.10	0.11	102
108	1.35	1.37	1.36	0.08	0.11	0.12	101
109	1.30	1.28	1.29	0.09	0.08	0.09	98
110	1.26	1.25	1.25	0.05	0.09	0.10	99
111	1.25	1.25	1.26	0.05	0.10	0.10	101
112	1.28	1.26	1.27	0.05	0.09	0.09	99
113	1.24	1.25	1.25	0.05	0.08	0.08	101
114	1.25	1.26	1.26	0.06	0.08	0.09	101
115	1.18	1.16	1.16	0.07	0.08	0.07	100
116	1.10	1.08	1.08	0.05	0.06	0.08	97
117	1.20	1.20	1.20	0.06	0.09	0.08	100
118	1.23	1.23	1.23	0.09	0.12	0.12	101

(cont'd)

Sample No.	Color Density		Background Fog (density)		Color Retention (%)	
	Before Testing		After Testing		Before Testing	
	(I)	(II)	(I)	(II)	(I)	(II)
A	1.25	1.24	1.23	0.08	0.11	0.09
B	1.28	1.10	1.08	0.07	0.08	0.09
C	1.35	0.95	0.89	0.06	0.12	0.11
D	1.32	0.87	0.75	0.08	0.09	0.10
E	1.10	1.22	1.25	0.12	0.25	0.23
F	1.31	1.25	1.22	0.05	0.11	0.10
G	1.34	1.30	1.29	0.08	0.10	0.11
H	1.38	1.30	1.33	0.08	0.11	0.12
I	1.32	1.30	1.29	0.09	0.08	0.08
J	1.28	1.25	1.24	0.06	0.08	0.09
K	1.27	1.26	1.25	0.05	0.09	0.10
L	1.26	1.24	1.24	0.05	0.09	0.09
M	1.26	1.25	1.24	0.05	0.08	0.08
N	1.26	1.25	1.25	0.05	0.08	0.09

Further, each of Samples 101 to 118 and A to N was evaluated for chemical resistance to a diazo developer, ethanol, castor oil, polyethylene glycol (PEG) and trioctyl phosphate (TOP). Filter papers impregnated with

0 253 666

these chemicals were superimposed on the coated surface of each sample, and heat recording was carried out. Image quality was visually observed as to fog formation on the white background and color image fading (discoloration) of the color developed area, and was rated as follows.

The results obtained are shown in Table 5 below.

- A: The change of image quality due to contact with chemicals is small or negligible.
- B: The image is legible.
- C: The image is somewhat legible.
- D: The image is seriously illegible.

5

10

15

20

25

30

35

40

45

50

55

60

65

TABLE 5

Sample No.	Discoloration				Background Fog			
	Diazo Developer		Ethanol	Castor Oil	FEG	TOP	Diazo Developer	Ethanol
	C	B	C	B	C	B	B	B
101	C	B	B	B	B	B	B	B
102	B	B	A	A	A	A	B	B
103	A	A	B	B	B	B	B	B
104	B	B	B	B	B	B	B	B
105	B	B	B	B	B	B	B	B
106	A	A	A	A	A	C	C	C
107	A	A	A	A	A	C	B	B
108	A	A	A	A	A	C	C	C
109	A	A	A	A	A	A	A	A
110	A	A	A	A	A	A	A	A
111	B	B	B	B	A	B	B	B
112	A	A	A	A	A	A	A	A
113	A	A	A	A	A	A	A	A
114	A	A	A	A	A	A	A	A
115	B	A	A	B	A	B	B	A
116	A	A	A	B	A	B	B	B
117	B	A	A	B	A	B	B	A
118	B	B	B	B	B	B	B	B

(cont'd)

Sample No.	Discoloration					Background Fog				
	Diazo Developer	Ethanol	Castor Oil	PEG	TOP	Diazo Developer	Ethanol	Castor Oil	PEG	TOP
A	B	C	D	D	D	D	D	D	D	C
B	C	C	D	D	D	D	D	D	D	C
C	D	C	D	D	D	D	D	D	D	C
D	D	C	D	D	D	D	D	D	D	C
E	A	C	D	D	D	D	D	D	D	C
F	C	C	C	C	C	C	C	C	C	C
G	C	C	C	D	C	C	B	B	B	B
H	C	C	C	D	C	C	C	C	C	C
I	C	C	C	C	D	A	A	A	A	A
J	C	C	C	D	C	A	A	A	A	A
K	D	B	D	B	D	B	A	B	B	B
L	C	C	C	C	C	A	A	A	A	A
M	C	C	C	C	C	A	A	A	A	A
N	C	C	C	C	C	A	A	A	A	A

Claims


5

1. A heat-sensitive recording material comprising a support having thereon a recording layer containing an electron-donating colorless dye color former and an electron-accepting developer compound, characterised in that (a) said electron-accepting complex is selected from (i) a salicylic acid derivative having an acyl group, a substituted amino group, an aryloxymethyl group, an alkoxy group or an aryloxy group and metal salts thereof, or (ii) a hydroxynaphthoic acid derivative having an alkoxy group and metal salts thereof, and (b) said recording layer also contains a metal compound in an amount of from 0.05 to 10 mols per mol of said electron-accepting compound.

10

2. A heat-sensitive recording material as in Claim 1, wherein said electron-accepting compound is represented by formula (I) or (II):


15

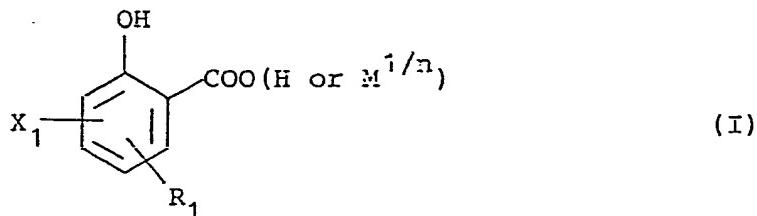

25

wherein R₁ represents a substituted or unsubstituted acyl group, a substituted amino group, a substituted or unsubstituted aryloxymethyl group, a substituted or unsubstituted alkoxy group, or a substituted or unsubstituted aryloxy group; X₁ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group or a halogen atom; and M represents an n-valent metal atom, wherein n represents an integer of from 1 to 3;

30

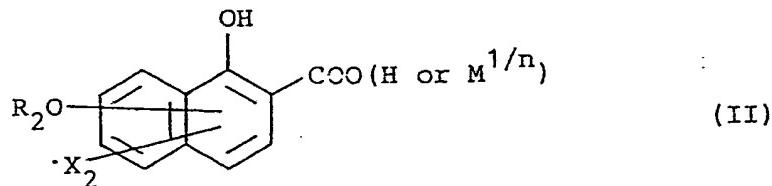


40

wherein M is as defined above in said formula (I); R₂ represents a substituted or unsubstituted alkyl group; X₂ represents a hydrogen atom, an acyl group, an alkyl group, an alkoxy group or a halogen atom.

45

3. A heat-sensitive recording material as in Claim 1, wherein said salicylic acid derivatives having an acyl group or a substituted amino group or metal salts thereof are represented by formula (III):

50

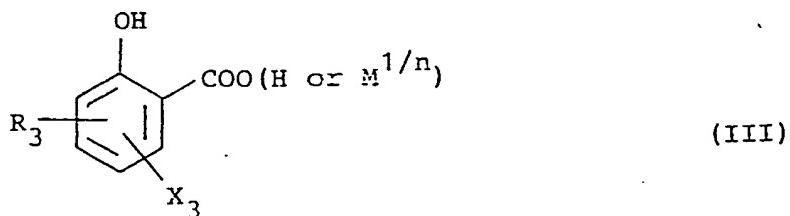


55


wherein R₃ represents a substituted or unsubstituted acyl group or a substituted amino group; X₃ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group or a halogen atom; and M represents an n-valent metal atom, wherein n represents an integer of from 1 to 3; said salicylic acid derivatives having an aryloxymethyl group or metal salts thereof are represented by formula (IV):

60


65

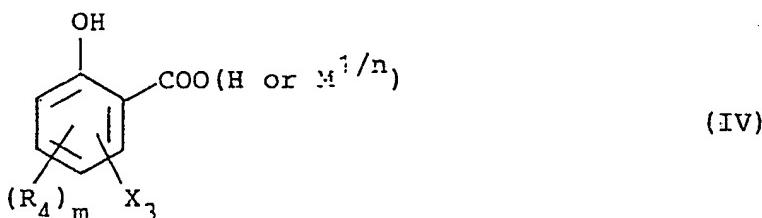

wherein X₃ and M are as defined above in formula (III); R₄ represents a substituted or unsubstituted aryloxymethyl group; and m represents an integer of 1 or 2; said salicylic acid derivatives having an alkoxy group or an aryloxy group or metal salts thereof are represented by formula (V):

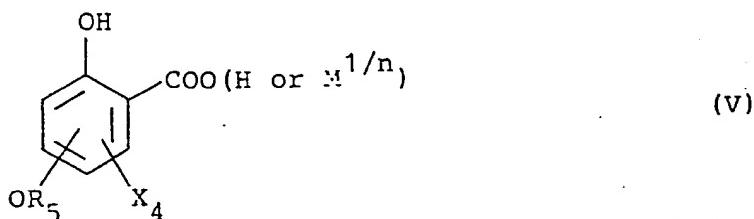

wherein M is as defined above in formula (III); R₅ represents a substituted or unsubstituted alkyl group or a substituted or unsubstituted aryl group; and X₄ represents a hydrogen atom, an alkyl group, an alkoxy group, a phenyl group or a halogen atom; and said hydroxynaphthoic acid derivatives having an alkoxy group or metal salts thereof are represented by formula (VI):

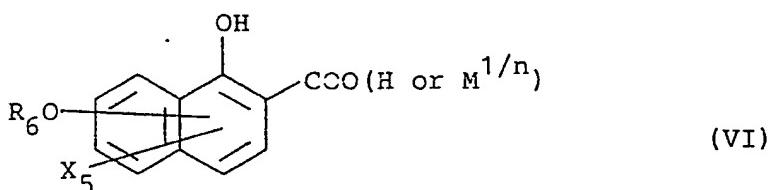

wherein M is as defined above in formula (III); R₆ represents a substituted or unsubstituted alkyl group; and X₅ represents a hydrogen atom, an acyl group, an alkyl group, an alkoxy group or a halogen atom.

4. A heat-sensitive recording material as in Claim 3, wherein the acyl group represented by R₃ contains from 2 to 18 carbon atoms.

5. A heat-sensitive recording material as in Claim 3, wherein the substituted amino group represented by R₃ is an acylamino group, an arylsulfonylamino group, an alkylaminocarbonylamino group, an aryl aminocarbonylamino group, a dialkylamino group or an alkylarylamino group, each of which may have from 2 to 18 carbon atoms.


6. A heat-sensitive recording material as in Claim 3, wherein the aryloxymethyl group represented by R₄ contains from 7 to 18 carbon atoms.

7. A heat-sensitive recording material as in Claim 3, wherein M is a hydrogen atom, zinc, aluminum, magnesium or calcium.

8. A heat-sensitive recording material as in Claim 3, wherein R₅ represents an alkyl group having from 1 to 30 carbon atoms or an aryl group having from 6 to 24 carbon atoms.

9. A heat-sensitive recording material as in Claim 8, wherein the alkyl group represented by R₅ is substituted with an aryl group, an alkoxy group, a halogen atom, an aryloxy group or an acylamino group and the aryl group represented by R₅ is substituted with an alkyl group, an alkoxy group, a halogen atom, a phenyl group or a substituted carbamoyl group.

10. A heat-sensitive recording material as in Claim 9, wherein said substituted aryl group represented by R₅ is represented by formula:



wherein Ar is a substituted or unsubstituted aryl group, p represents an integer of from 1 to 10, and q

65

represents an integer of from 1 to 3.

11. A heat-sensitive recording material as in Claim 3, wherein said salicylic acid derivatives represented by formula (V) contains at least 13 total carbon atoms.

5 12. A heat-sensitive recording material as in Claim 3, wherein the substituent OR₅ in formula (V) is bonded to the para-position with respect to the carboxyl group.

13. A heat-sensitive recording material as in Claim 3, wherein the alkyl group represented by R₆ contains from 1 to 22 carbon atoms.

14. A heat-sensitive recording material as in any preceding claim, wherein said metal compound is selected from oxides, hydroxides, sulfides, carbonates, phosphates, silicates, halides, halogen complex salts, sulfates, and nitrates of zinc, magnesium, barium, calcium, aluminum, tin, titanium, nickel, cobalt, manganese or iron.

15. A heat-sensitive recording material as in Claim 14, wherein said metal compound is selected from sparingly water-insoluble zinc compounds.

16. A heat-sensitive recording material as in any preceding claim, wherein said metal compound is used in an amount of from 0.05 to 10 mols per mol of the salicylic acid derivatives.

17. A heat-sensitive recording material as in any preceding claim, wherein said metal compound is used in an amount of from 0.10 to 8 mols per mol of the electron-accepting compound.

18. A heat-sensitive recording material as in any preceding claim, wherein at least 80% by weight of said metal compound is used in the form of a dispersion with said salicylic acid derivatives.

20 19. A heat-sensitive recording material as in any preceding claim, wherein said electron-accepting compounds are present in an amount of from 50 to 800 wt% based on the amount of said electron-donating colorless dye.

25 20. A heat-sensitive recording material as in any preceding claim, wherein said recording layer further contains a heat-fusible substance having a melting point of from 70 to 150°C in an amount of from 10 to 200 wt% based on the amount of said electron-accepting compound.

30

35

40

45

50

55

60

65

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)